

AS

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/71321 A2

- (51) International Patent Classification⁷: **B29C**
- (21) International Application Number: **PCT/US00/11969**
- (22) International Filing Date: **3 May 2000 (03.05.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/316,822 **21 May 1999 (21.05.1999)** **US**
- (71) Applicant: **MICROSOFT CORPORATION [US/US];**
One Microsoft Way, Redmon, WA 98052 (US).
- (72) Inventors: **ANDREW, Felix, G., T., I.;** 5221 37th Avenue N.E., Seattle, WA 98105 (US). **SOBESKI, David, A.;** 15817 N.E. 90th Street, Redmond, WA 98052 (US).

SMITH, Michael, D.; 1814 First Street, Kirkland, WA 98033 (US). **POST, Lisa, G.;** 15981 N.E. 84th Street, Redmond, WA 98052 (US).


(74) Agent: **ROCCI, Steven, J.;** Woodcock Washburn Kurtz MacKiewicz & Norris LLP, One Liberty Place, 46th floor, Philadelphia, PA 19103 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,

[Continued on next page]

(54) Title: **SHARED VIEWS FOR BROWSING CONTENT**

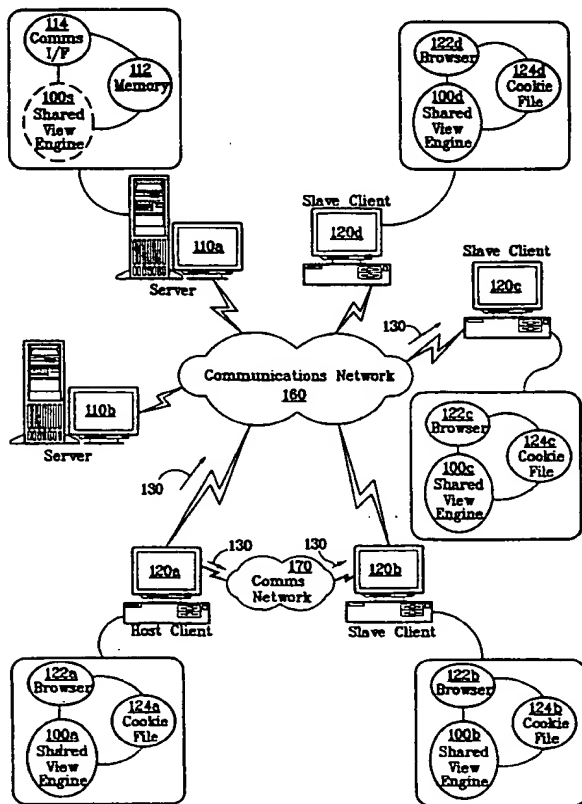

(57) Abstract: Systems and methods for enabling users at a plurality of client computers to share a common browsing experience are provided. According to the method of the present invention, a host client computer establishes a first communications link to one of a plurality of servers and a second communications link to one or more remote slave client computers. A shared view engine on the host obtains an outgoing Universal Resource Locator (URL) from a browser running on the host. The host sends the outgoing URL, along with any required cookie data, to the slave. The slave modifies its cookie file, if necessary, and requests the same content from the server by sending the received URL to one of the servers. Alternatively, the servers can deliver the same content to the host and to the slave when either the host or the slave sends a URL to one of the servers.



WO 00/71321 A2



MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *Without international search report and to be republished upon receipt of that report.*

SHARED VIEWS FOR BROWSING CONTENT

5 TECHNICAL FIELD

The present invention relates generally to the field of client-server computing, and more particularly to methods and systems for allowing multiple clients to share a common browsing experience.

BACKGROUND OF THE INVENTION

10 The Internet is a worldwide computer network via which computer systems communicate using the well-defined Internet Protocol (IP). Computers that are connected directly to the Internet each have a unique Internet address. Typically, each computer is assigned a unique IP address so that no two machines have the same IP address. To simplify Internet addressing, the Domain Name System (DNS) allows users to access
15 Internet resources with a simpler alphanumeric naming system. An Internet Domain name includes a series of alphanumeric names separated by periods. To further define the addresses of resources on the Internet, the Universal resource Locator system was created. A Universal resource Locator (URL) is a descriptor that specifically defines a type of Internet resource and its location. Resources on the Internet are uniquely
20 addressable by their URL.

Typically, a user navigates the Internet using a browser residing on the user's computer. The browser is an operating system component or application program that allows the user to retrieve documents from the World Wide Web (or simply "the Web") using simple point-and-click commands. Typical browsers allow for multimedia
25 presentation of stored data including text images, sound clips, and video clips. This allows the user to connect to different Web sites on the Internet.

The Web is a collection of files or "Web pages" that include text, graphics, and other forms of content. Typically, a Web page is connected by hyper-links to other Web pages. Using a mouse to click on a hyper-link initiates a process that locates and
30 retrieves the linked Web page, regardless of the physical location of that page.

The Web uses the client-server model to communicate information between client computers and server computers. The terms "client" and "server" are used to refer

-2-

to a computer's general role as a requester of data (the client) or provider of data (the server). In the Web environment, browsers reside in clients and Web pages reside in servers. Clients and servers communicate with one another using the Hypertext Transfer Protocol (HTTP). A browser opens a connection to a server and initiates a request for a Web page. The server delivers the requested Web page, typically in the form of a text document coded in a standard Hypertext Markup Language (HTML) format.

To access an initial Web page, the user enters the URL for a Web document into the browser, or selects the URL from a list of "favorites" (which is typically stored on the client's hard drive). The browser then sends an HTTP request to the server that has the Web document corresponding to the URL, and the Web server responds to the HTTP request by sending the requested HTTP object to the client.

One application, known as a "customizable home page," permits users, upon the request of a server, to make certain choices. When a user who has done so contacts that server at a later date, the server assembles information for downloading to the user in accordance with the previously selected choices. The server delivers a Web page with a response header which creates an ID field located in a file on the client computer (this file is known as the "client ID" or "cookie" file) to include information about the user's preferences. When the user later returns to a specified URL, on the same server, the cookie with the previously-set preference information is transmitted in the HTTP request header to the server, which can then return a Web page that is assembled according to the user-specific information.

There are certain situations in which it would be advantageous for multiple users to navigate the Web together. That is, the several users would benefit from being able to view the same Web pages at the same time automatically. For example, two users located at different computers in different parts of the world might want to search for certain content on the Web. Each of the users would benefit from being able to share the other's browsing experience, such that, when either user navigates to a Web site, the other would follow along automatically.

SUMMARY OF THE INVENTION

The present invention provides a mechanism for multiple network-based clients to share a common browsing experience. According to the present invention, a number of client computers are connected to one or more server computers via a communications

-3-

network such as a local area network (LAN), wide area network (WAN), intranet, or the Internet. A user on a first, or host, client begins "browsing" the network, *i.e.*, requesting that the servers deliver certain content to the host client. If the user at the host client so desires, he can grant permission to one or more of the other, or slave, clients to share in
5 the browsing experience.

In one implementation of the invention, to enable the slave clients to share in the browsing experience, the host client sends information such as URL and cookie data to the slave clients. Using the information from the host client, the slave clients can request the same Web pages being viewed by the host client. Alternatively, the host client
10 requests the content not only for itself, but for the slave clients as well.

For security reasons, it is preferable for permission to be granted unilaterally, *i.e.*, for the host client to grant permission to the slave clients to browse along with the host. That is, the slave clients cannot share the host's browsing experience without the host's permission.

15 In an exemplary implementation of the invention, the clients communicate with each other via PPTP (Point to Point Tunneling Protocol), although any appropriate point-to-point communications protocol could be used. For example, when the host client requests a Web page from a Web server, it sends the URL for that page and any needed cookie data to the slave clients via a communications link that supports a point-to-point
20 protocol. The slave clients can then request the same Web page from that server. In this way, the users of different clients enjoy a shared browsing experience while incurring the small overhead required to transmit the URL and any needed cookie data between the clients. Once the users are all browsing together, each user will be able to view the current page independently of every other user. If any user requests a different Web
25 page, however, all the clients will request (or be sent) the same Web page. In this way, all the clients continue to share the same browsing experience.

These and other features of the present invention are described in greater detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

30 The foregoing summary and the following detailed description of presently preferred embodiments are better understood when read in conjunction with the appended drawings, in which:

Figure 1 is a block diagram representing a general purpose computer system in which aspects of the present invention may be incorporated.

Figure 2 is a schematic diagram of a system for enabling multiple users to share a common browsing experience in accordance with the present invention.

5 Figure 3 is a flowchart of a method for operating a host client computer that enables multiple users to share a common browsing experience in accordance with the present invention.

10 Figure 4 is a flowchart of a method for operating a slave client computer that enables multiple users to share a common browsing experience in accordance with the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Overview

The methods and systems of the present invention provide a mechanism for multiple users to share a common browsing experience in an environment where a plurality of client computers are networked to one or more server computers via a communications network such as the Internet (although the invention is by no means limited to uses on the Internet). Basically, a shared view engine according to the present invention enables a user at a host client to grant permission to other ("slave") clients to share the same browsing experience by causing the servers to download to all of the clients Web pages requested by any one of them.

20 In one embodiment, a shared view engine is run on each of the plurality of clients. The shared view engines interface with the browsers resident on the clients. The shared view engine on the host client is launched when the user at the host client instructs the browser to connect to the network. If the user at the host client wishes to permit the users at the slave clients to share in the browsing experience, the user at the host client can grant permission to the slave clients to do so.

30 More specifically, the shared view engine at the host client establishes a point to point connection with the shared view engines at the slave clients. From that point onward, whenever the host client requests a Web page from a server, the shared view engine at the host client sends a message to each of the slave clients that includes the URL for the requested Web page. The shared view engines on the slave clients request, via their respective browsers, the same Web page by sending the URL to that server. If

-5-

cookie data is required to access a Web site, the host client sends the cookie data along with the URL.

Similarly, if any of the slave clients requests a Web page, the requesting slave client sends the URL and cookie data to the host client, which in turn sends the URL and
5 cookie data to any other slave clients. The host client and the other slave clients all request the same Web page. In this way, the host client and the slave clients are always "on the same page."

Alternatively, the host client can instruct a server to deliver the requested content to all the clients if any one client requests a Web page. Thereafter, if any client (host or
10 slave) requests a Web page, the server delivers the content to all the clients. Once again, this ensures that all the clients are on the same page at all times.

The present invention will now be explained in greater detail with reference to a presently preferred embodiment thereof. First, a description of exemplary computer and network environments is provided, and then a detailed description of the inventive
15 methods and systems for enabling a plurality of client computers to share views for browsing content is provided.

Computer Environment

Figure 1 and the following discussion are intended to provide a brief general description of a suitable computing environment in which the invention may be
20 implemented. Although not required, the invention will be described in the general context of computer-executable instructions, such as program modules, being executed by a computer, such as a client workstation or a server. Generally, program modules include routines, programs, objects, components, data structures and the like that perform particular tasks or implement particular abstract data types. Moreover, those skilled in
25 the art will appreciate that the invention may be practiced with other computer system configurations, including hand-held devices, multi-processor systems, microprocessor-based or programmable consumer electronics, network PCs, minicomputers, mainframe computers and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing
30 devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

-6-

As shown in Figure 1, an exemplary general purpose computing system includes a conventional personal computer 20 or the like, including a processing unit 21, a system memory 22, and a system bus 23 that couples various system components including the system memory to the processing unit 21. The system bus 23 may be any of several types of bus structures including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory includes read-only memory (ROM) 24 and random access memory (RAM) 25. A basic input/output system 26 (BIOS), containing the basic routines that help to transfer information between elements within the personal computer 20, such as during start-up, is stored in ROM 24. The personal computer 20 may further include a hard disk drive 27 for reading from and writing to a hard disk (not shown), a magnetic disk drive 28 for reading from or writing to a removable magnetic disk 29, and an optical disk drive 30 for reading from or writing to a removable optical disk 31 such as a CD-ROM or other optical media. The hard disk drive 27, magnetic disk drive 28, and optical disk drive 30 are connected to the system bus 23 by a hard disk drive interface 32, a magnetic disk drive interface 33, and an optical drive interface 34, respectively. The drives and their associated computer-readable media provide non-volatile storage of computer readable instructions, data structures, program modules and other data for the personal computer 20. Although the exemplary environment described herein employs a hard disk, a removable magnetic disk 29, and a removable optical disk 31, it should be appreciated by those skilled in the art that other types of computer readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories (RAMs), read-only memories (ROMs) and the like may also be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk, magnetic disk 29, optical disk 31, ROM 24 or RAM 25, including an operating system 35, one or more application programs 36, other program modules 37 and program data 38. A user may enter commands and information into the personal computer 20 through input devices such as a keyboard 40 and pointing device 42. Other input devices (not shown) may include a microphone, joystick, game pad, satellite disk, scanner, or the like. These and other input devices are often connected to the processing unit 21 through a serial port

-7-

interface 46 that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, game port, or universal serial bus (USB). A monitor 47 or other type of display device is also connected to the system bus 23 via an interface, such as a video adapter 48. In addition to the monitor 47, personal computers typically include
5 other peripheral output devices (not shown), such as speakers and printers. The exemplary system of Figure 1 also includes a host adapter 55, Small Computer System Interface (SCSI) bus 56, and an external storage device 62 connected to the SCSI bus 56.

The personal computer 20 may operate in a networked environment using logical connections to one or more remote computers, such as a remote computer 49. The
10 remote computer 49 may be another personal computer, a server, a router, a network PC, a peer device or other common network node, and typically includes many or all of the elements described above relative to the personal computer 20, although only a memory storage device 50 has been illustrated in Figure 1. The logical connections depicted in Figure 1 include a local area network (LAN) 51 and a wide area network (WAN) 52.
15 Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets, and the Internet.

When used in a LAN networking environment, the personal computer 20 is connected to the LAN 51 through a network interface or adapter 53. When used in a WAN networking environment, the personal computer 20 typically includes a modem 54
20 or other means for establishing communications over the wide area network 52, such as the Internet. The modem 54, which may be internal or external, is connected to the system bus 23 via the serial port interface 46. In a networked environment, program modules depicted relative to the personal computer 20, or portions thereof, may be stored in the remote memory storage device. It will be appreciated that the network connections
25 shown are exemplary and other means of establishing a communications link between the computers may be used.

Network Environment

As noted, the computer described above can be deployed as part of a computer network. In general, the above description applies to both server computers and client
30 computers deployed in a network environment. Figure 2 illustrates one such exemplary network environment in which the present invention may be employed.

-8-

As shown in Figure 2, a number of server computers 110 are interconnected with a number of client computers 120 via a communications network 160 (which can be a LAN, WAN, intranet, or the Internet). In a network environment in which the communications network 160 is the Internet, for example, the servers 110 can be Web servers with which the clients 120 communicate via any of a number of known protocols, such as HTTP.

A client computer 120 interfaces with the communications network 160 via a browser 122. The browser 122 enables the user at the client 120 to access certain sites on the servers 110. Where network 160 is the Internet, the servers 110 are Web servers and the sites are known as "Web sites." Currently, a number of browsers 122 are commercially available for personal computers and other types of client computers 120 (such as hand-held computers, palm-sized computers, or any other type of computer that can be used for browsing).

Each client computer 120 also has a cookie file 124. The cookie files 124 include information the respective clients 120 need to access certain sites on the servers 110. In particular, some Web sites require the client to provide a username and password, for example, before the corresponding server 110 will download content from the Web site onto the client 120. Typically, these usernames and passwords, along with other access information, such as registration numbers, etc., are included in the client's cookie file 124. When the user enters a URL for a Web site that requires cookie data, the server 110 requests the cookie data from the client 120. In response, the browser 122 gathers the required cookie data from the cookie file 124 and provides the cookie data to the server 110. Assuming the cookie data is correct, the server 110 then delivers the content from the Web site to the client 120.

Methods and Systems for Enabling Multiple Clients to Share a Browsing Experience

In a preferred embodiment of the present invention, each client computer 120 also includes a shared view engine 100 that enables multiple clients 120 to enjoy the same user experience. For explanatory purposes, client computer 120a will be referred to as the "host client," while the remaining clients 120b-d will be referred to as the "slave clients," although this designation is arbitrary. That is, in general, any of the clients 120

can be the host client for a shared browsing experience, although, in this implementation, there is only one host at a time during any particular shared experience.

If the user at the host client 120a wishes to share the browsing experience with the users at one or more of the slave clients 120b-c, the user at the host client 120a can
5 cause the host client 120a to grant permission to any or all of the slave clients 120b-d to view the same content at the same time. For security reasons, it is preferred that the slave clients 120b-d be unable to share in the host client's browsing experience without permission from the host client 120a to do so.

To share the browsing experience, the user at the host client 120a executes the
10 shared view engine 100a residing on the host client 120a. The user identifies to the shared view engine 100a those slave clients that the user wishes to grant permission to share the browsing experience. The user can share with any number of slave clients by identifying them to the shared view engine. For purposes of discussion, suppose that the user identifies slave clients 120b and 120c, but not 120d.

15 The shared view engine 100a establishes a communications link 130 between the host client 120a and the identified slave clients 120b, 120c. In a preferred embodiment, the communications link 130 supports a communications protocol such as point-to-point tunneling protocol (PPTP). PPTP is a protocol that encapsulates point-to-point protocol frames in IP datagrams for transmission over an IP internetwork, such as the Internet.
20 PPTP can also be used in private LAN-to-LAN networking. Layer 2 Tunneling Protocol (L2TP) can also be used. L2TP is a network protocol that encapsulates point-to-point protocol frames to be sent over IP, X.25, Frame Relay, or Asynchronous Transfer Mode (ATM) networks. When configured to use IP as its datagram transport, L2TP can be used as a tunneling protocol over the Internet. L2TP can also be used directly over various
25 WAN media (such as Frame Relay) without an IP transport layer. Although the above-described tunneling protocols are preferred, any protocol on which the clients agree can be used. It is contemplated that, in an Intranet or other "non-firewall" setting, TCP/IP can be used. Thus, the communications link 130 can be established over the communications network 160 (the Internet in this example), or over a second communications network
30 170, which can be a LAN, for example, or by a direct connection between the clients 120, etc.

-10-

When the user at the host client 120a requests a Web site from one of the servers 110a, 110b, the shared view engine 100a on the host client 120a obtains, or intercepts, the URL for the requested Web site from the browser 122a. The shared view engine 100a sends the URL via the communications links 130 to the shared view engines 100b, 100c on the identified slave clients 120b, 120c. The shared view engines 100b, 100c pass the URL onto their respective browsers 122b, 122c, which request the same Web page from the server 110. In response, the server 100 downloads the content of the Web page onto the slave clients 120b, 120c. At this point, the host client 120a and the slave clients 120b, 120c are all viewing the same content, *i.e.*, sharing the same browsing experience.

10 (Although the individual clients may *view* the Web pages differently, *i.e.*, the color, font, scroll position, etc., may be different for the respective clients.)

In some applications, the host client 120a can only view certain Web sites if it has certain required cookie data. Cookie data for the host client 120a is included in its cookie file 124a. Presumably, the slave clients 120b, 120c do not have the required cookie data in their cookie files 124b, 124c (although, by coincidence, they might). In this case, the shared view engine 100a will send not only the URL for the Web site, but also any required cookie data to the shared view engines 100b, 100c on the slave clients 120b, 120c. Shared view engines 100b, 100c will then update cookie files 124b, 124c, respectively, to include the additional cookie data. In this way, the slave clients 120b, 120c will have all the required permissions, etc., to access whatever Web site(s) the host client 120a is viewing.

15
20

In a preferred embodiment, once the host client 120a and the slave clients 120b, 120c are all viewing the same Web page, any of the clients 120 can "jump" to another Web site without permission from the host client 120a. Suppose the user at slave client 120b wishes to view a different Web page and provides a new address to browser 122b. The server 110 on which the Web page resides responds by downloading the content for the newly requested Web site onto the client 120b. Concurrently, the shared view engine 100b sends the URL and any required cookie data for the newly requested Web site to the host client 120a. The host client 120a then sends the URL and cookie data to the other slave clients, *i.e.*, slave client 120c in the present example. The shared view engines 100a, 100c on the other clients 120a, 120c then cause their browsers 122a, 122c

25
30

-11-

to request the new Web site from that server 110. The server 110 responds by downloading the content for the newly requested Web site onto the clients 120a, 120c.

In an alternative embodiment, the slave client 120b that requested the new Web site can send the URL and cookie data for the new Web site to all the other clients 120a, 120b. In this embodiment, however, every client 120 would have to establish a communications link 130 to every other client 120.

In still another embodiment of the present invention, the shared view engine 100a on the host client 120a could be made to control the entire experience. That is, the shared view engines 100b, 100c on the slave clients 120b, 120c could prevent the slave clients 120b, 120c from requesting any Web site during a shared browsing experience unless directed to do so by the host client 120a.

The user of any of the clients 120 can terminate the shared browsing experience for that client 120 by disconnecting from the communications network 160, or by terminating the shared view engine 100. When the user at client 120c, for example, decides to disconnect from the network 160, the shared view engine 100c terminates the communications link 130 to the host client 120a. The shared view engine 100c also ensures that the slave client's cookie file 124c is restored to its original state so that slave client 120c does not retain the access information provided to it by any of the other clients 120a, 120c. For this reason, the shared view engine 100 must maintain a copy of the original cookie file for restoration at the end of the shared viewing session.

Preferably, the user at slave client 120c can disconnect from the shared viewing experience without having to disconnect from the communications network 160. In such an embodiment, the user at slave client 120c interfaces directly with the shared viewing engine 100c to terminate the shared viewing engine 100c rather than the browser 122c. In this case, the shared viewing engine 100c terminates the communications link 130 to the host client 120a and restores the slave client's original cookie file 124c.

In another exemplary embodiment, a server-based shared view engine 100s is installed onto one or more of the servers, say server 110a as shown in Figure 2. In this embodiment, the user at the host client 120a connects to server 110a via the communications network 160. The user at the host client 120a can then grant permission to one or more of the slave clients 120b-d to share the host client's browsing experience. To accomplish this, the shared view engine 100a on the host client 120a sends a message

-12-

to server 110a that includes an identifier for each of the identified slave clients 120b-c. Preferably, the identifier is the IP address of the identified slave client. The server stores the identifiers in memory 112 in a file in which the identifiers are associated with an identifier that identifies the host client 120a. From that point onward, whenever one of
5 the clients 120a-c requests a Web page from server 110a, server 110a draws on the identifiers stored in the file to enable server 110a to download the same content to all the clients 120a-c. Server 110a interfaces with the communications network 160 via a communications interface 114.

If the client 120 requesting the Web site (the "requesting client") needs cookie
10 data to access the requested Web site, the requesting client sends the necessary cookie data to server 110a along with the URL. In this case, there is no need for the shared view engine 100 at the requesting client to send the cookie data or the URL for the Web site to the other clients. As long as the requesting client has the necessary cookie data, the shared view engine 100s at server 110a causes the server to download the same Web
15 page to all the clients 120a-c. In this way, the requesting client tacitly grants permission for the other clients to view the Web page without actually altering the other clients' cookie files. Consequently, there is no need for the shared view engines 100a-c to keep track of the cookie files 124a-c residing on clients 120a-c, nor is there any need for the shared view engines 100a-c to restore the original cookie files when the session is
20 terminated.

When one of the clients 120a-c decides to terminate the session, the shared view engine 100s at server 110a recognizes that the client has disconnected from the communications network 160 or otherwise requested that it be released from the shared session. Consequently, the shared view engine 100s no longer causes server 110a send
25 the shared content to the disconnected client. If the host client 120a disconnects or otherwise terminates its shared session, the shared view engine 100s will terminate the shared viewing session for all the clients because the host client 120a is the only client that can grant permission for shared viewing.

Figure 3 is a flowchart of a method 400 for operating a host client computer that
30 enables multiple users to share a common browsing experience in accordance with the present invention. At step 410, the user at the host client computer establishes a first communications link (such as via the Internet) between the host client computer and a

-13-

first Web server. At step 412, via a shared view engine running on the host client computer, the user establishes a second communications link (such as via PPTP) to one or more remote slave client computers.

At step 414, the user at the host client computer requests a Web page from the
5 first Web server or from another Web server by transmitting an outgoing URL that corresponds to the selected Web page. The host client computer transmits the URL to the appropriate server via a browser running on the host client computer.

At step 416, the shared view engine running on the host client computer intercepts the outgoing URL from the browser. At step 418, the shared view engine on
10 the host client computer sends the outgoing URL, along with any required cookie data, via the second communications link to shared view engines running on the remote slave client computers.

Figure 4 is a flowchart of a method 500 for operating a slave client computer that enables multiple users to share a common browsing experience in accordance with the
15 present invention. At step 510, a user at the slave client computer establishes a communications link between the slave client computer and a Web server. At step 512, the slave client computer receives from the remote host client computer, via the communications link established between the slave client computer and the remote host client computer, an incoming URL corresponding to the selected Web page, along with
20 any required cookie data. At step 514, the shared view engine running on the slave client computer causes a browser running on the slave client computer to transmit the incoming URL to the Web server via a browser running on the slave client computer. In this way, the host client computer and the slave client computers are all browsing the same content.

25 An important feature of the preferred embodiments of the present invention is the use of a shared view engine that resides on multiple server computers or on multiple client computers to enable the several clients to share the same browsing experience. It is understood, however, that the invention is susceptible to various modifications and alternative embodiments. It should be understood that there is no intention to limit the
30 invention to the specific embodiments described herein. On the contrary, the invention is intended to cover all modifications, alternative constructions, and equivalents falling within the scope and spirit of the claimed invention.

-14-

CLAIMS

We claim:

1. A host client computer capable of shared browsing, comprising:
a communications interface to a communications network for establishing a first communications link between the host client computer and a server on the communications network; and
5 a shared view engine for establishing a second communications link between the host client computer and a remote computer, and for providing to the remote computer a Universal Resource Locator (URL) corresponding to information to be provided by the server for display on the host client computer, whereby the host client computer and remote computer are able to utilize the URL for shared browsing of content received
10 from the server.
2. The host client computer of claim 1, wherein the communications interface enables the host client computer to establish the first communications link to any of a plurality of servers on the communications network.
3. The host client computer of claim 1, further comprising:
15 a cookie file that includes cookie data, wherein the shared view engine sends the cookie data via the communications link to the remote computer.
4. The host client computer of claim 1, wherein the shared view engine establishes a communications link to each of a plurality of remote computers, and provides the URL to each of the plurality of remote computers.
- 20 5. The host client computer of claim 1, wherein the shared view engine accepts as input from the user an identifier that identifies the remote computer, and establishes the second communications link based on the identifier.

-15-

6. The host client computer of claim 1, wherein the shared view engine accepts as input from the user an identifier for the remote computer, and provides the identifier to the server via the communications network.

7. The host client computer of claim 1, wherein the communications interface
5 comprises a browser, and the shared view engine obtains the URL from the browser before providing the URL to the remote computer.

8. The host client computer of claim 7, wherein the communications network is the Internet, and the server is a Web server that provides selected Web pages to the host client computer and the remote computer in response to receiving URLs corresponding
10 to the selected Web pages.

9. The host client computer of claim 8, wherein the second communications link comprises a Point to Point Tunneling Protocol.

10. A slave client computer capable of shared browsing with a remote host client computer, comprising:
15 a communications interface to a communications network for establishing a first communications link between the slave client computer and a server on the communications network; and
a shared view engine for receiving from the remote host client computer, via a second communications link to the remote host client computer, a Universal Resource
20 Locator (URL) corresponding to content to be provided by the server for display on the slave client computer, and for causing the received URL to be communicated to the server, whereby the remote host client computer and slave client computer are able to utilize the URL for shared browsing of the content provided by the server.

11. The slave client computer of claim 10, wherein the communications interface
25 enables the host client computer to establish the first communications link to any of a plurality of servers on the communications network.

-16-

12. The slave client computer of claim 10, wherein the communications interface comprises a browser, and wherein the shared view engine causes the browser to communicate the received URL to the server.

13. The slave client computer of claim 10, wherein the communications interface
5 comprises a browser, wherein the shared view engine obtains a user-entered URL from the browser and provides the user-entered URL to the remote host client computer, whereby the remote host client computer is enabled to request the same content from the server as the slave client computer.

14. The slave client computer of claim 13, further comprising:
10 a cookie file that includes cookie data, wherein the shared view engine sends the cookie data via the second communications link to the remote host client computer.

15. The slave client computer of claim 10, further comprising:
an unmodified cookie file that includes cookie data, wherein the shared view engine receives additional cookie data from the remote host computer via the second
15 communications link, and modifies the unmodified cookie file to include the additional cookie data.

16. A method for operating a host client computer comprising:
establishing a first communications link between the host client computer and a Web server;
20 establishing a second communications link between the host client computer and a remote slave client computer;
transmitting to the Web server via a browser running on the host client computer, an outgoing Universal Resource Locator (URL) corresponding to a selected Web page:
detecting the outgoing URL from the browser; and
25 sending the outgoing URL via the second communications link to the remote slave client computer.

-17-

17. The method of claim 16, further comprising:

sending, via the second communications link, to the remote slave client, cookie data from a cookie file residing on the host client computer.

18. The method of claim 16, further comprising:

5 establishing a communications link between the host client computer and each of a plurality of slave client computers; and
 sending the outgoing URL to each of the plurality of slave client computers.

19. The method of claim 16, further comprising:

 accepting as input from a user at the host client computer, an identifier that
10 identifies the remote slave client computer; and
 transmitting the identifier to the server via the first communications network.

20. The method of claim 16, further comprising:

 receiving an incoming URL from the remote slave client computer via the second communications link; and
15 transmitting the incoming URL to the server via the browser running on the host client computer.

21. The method of claim 16 wherein the step of establishing the first communications link comprises establishing the first communications link between the host client computer and any of a plurality of Web servers.

20 22. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 16.

23. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 17.

25 24. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 18.

25. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 19.

26. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 20.

5 27. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 21.

28. A method for operating a slave client computer comprising:
establishing a first communications link between the slave client computer and a Web server;
10 receiving from a remote host client computer, via a second communications link established between the slave client computer and the remote host client computer, an incoming Universal Resource Locator (URL) corresponding to a selected Web page; and
transmitting the incoming URL to the server via a browser running on the slave client computer.

15 29. The method of claim 28, further comprising:
receiving additional cookie data from the remote host client computer via the second communications link; and
modifying a cookie file residing on the slave client computer to include the additional cookie data.

20 30. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 28.

31. A computer readable storage medium comprising computer executable instructions for performing the method recited in claim 29.

-19-

32. A server computer comprising:

a communications interface to a communications network for establishing a first communications link between the server and a host client computer and a second communications link between the server and a slave client computer; and

5 a shared view engine for receiving via the first communications link from the host client computer, an identifier that identifies the slave client computer and a locator corresponding to content on the server, and for causing the server to deliver via the communications interface to the host client computer and to the slave client computer the content corresponding to the locator, whereby the host client computer and the slave
10 client computer are enabled to share browsing of the content received from the server.


33. The server computer of claim 32, wherein the server is a Web server, the content is a Web page, and the locator is a Universal Resource Locator (URL) corresponding to the Web page.

34. The server computer of claim 32, wherein the communications network is the
15 Internet.

35. The server computer of claim 32, wherein the communications network is an intranet.


36. The server computer of claim 32, wherein the communications network is a wide area network.

20 37. The server computer of claim 32, wherein the communications network is a local area network.

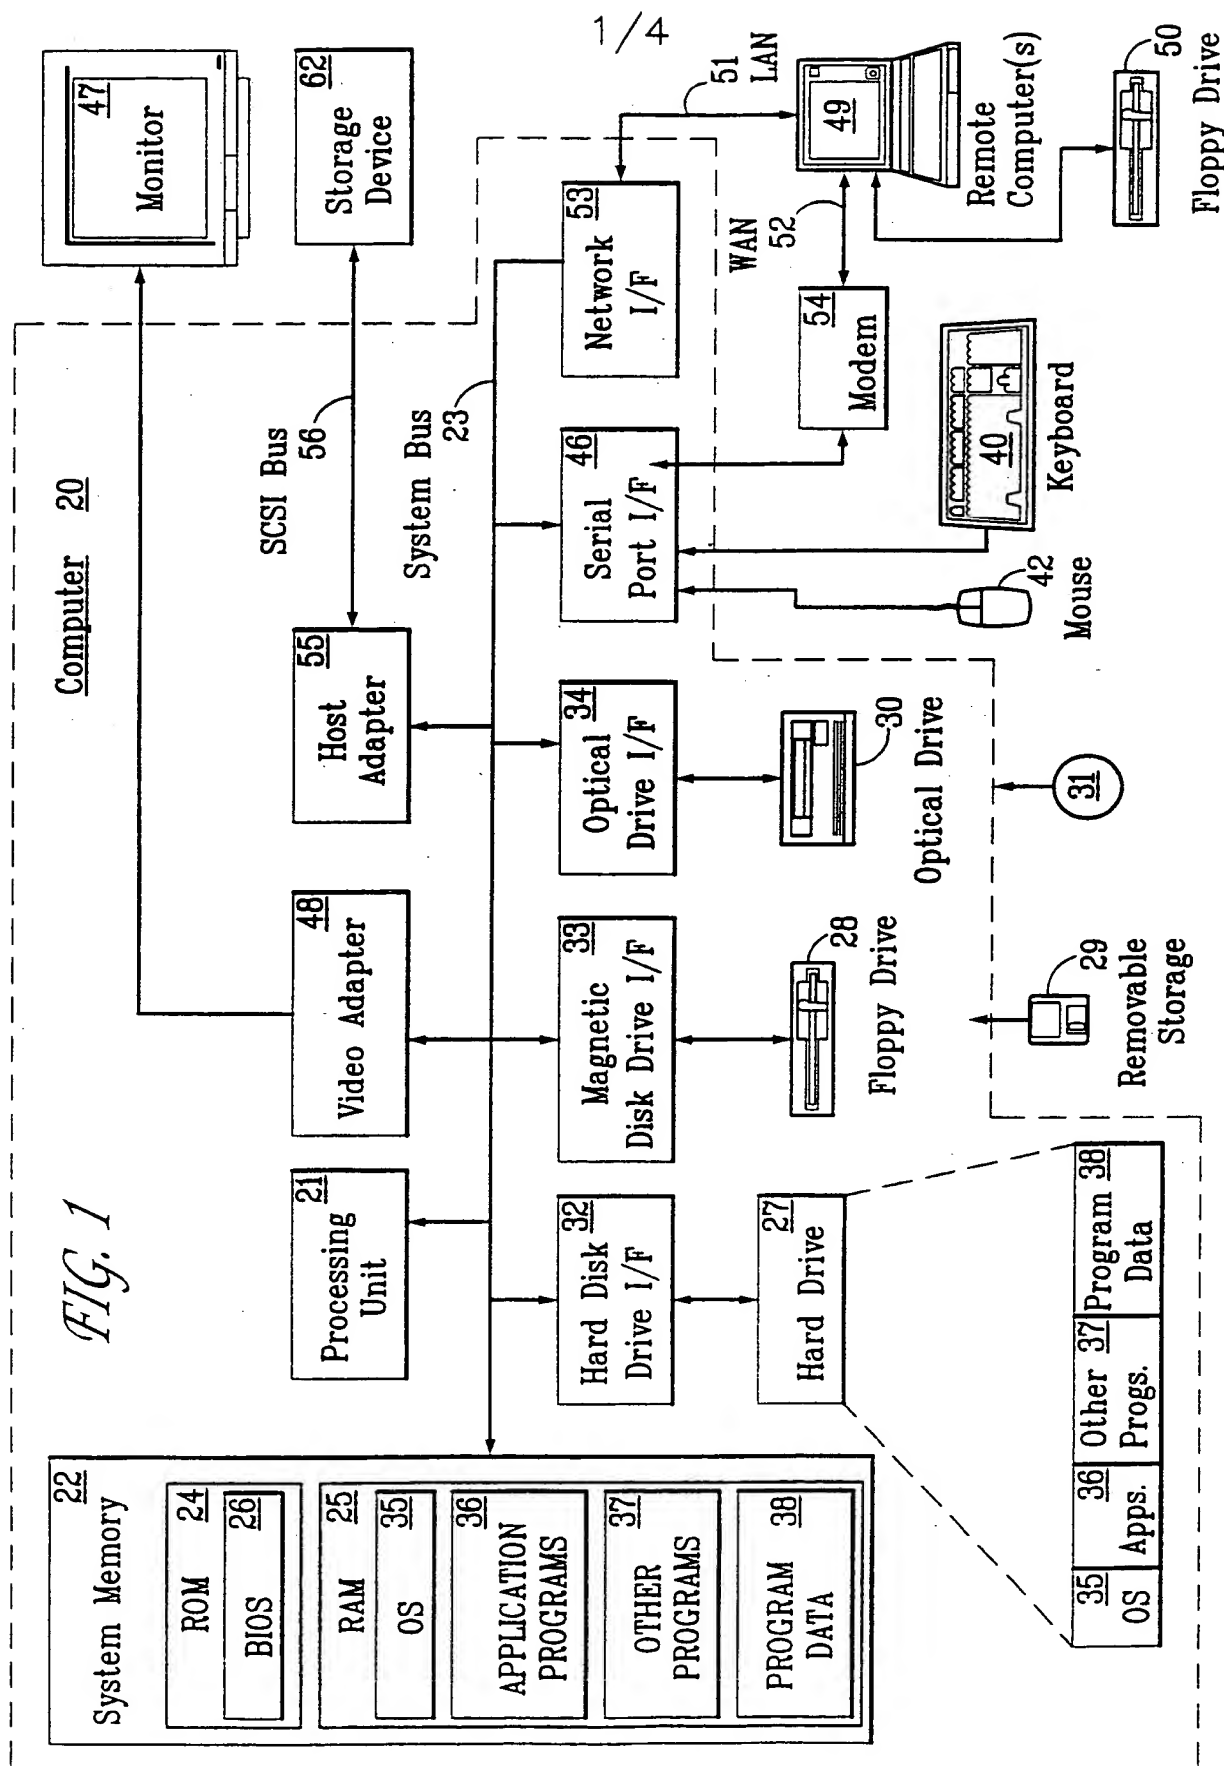


2/4

FIG. 2

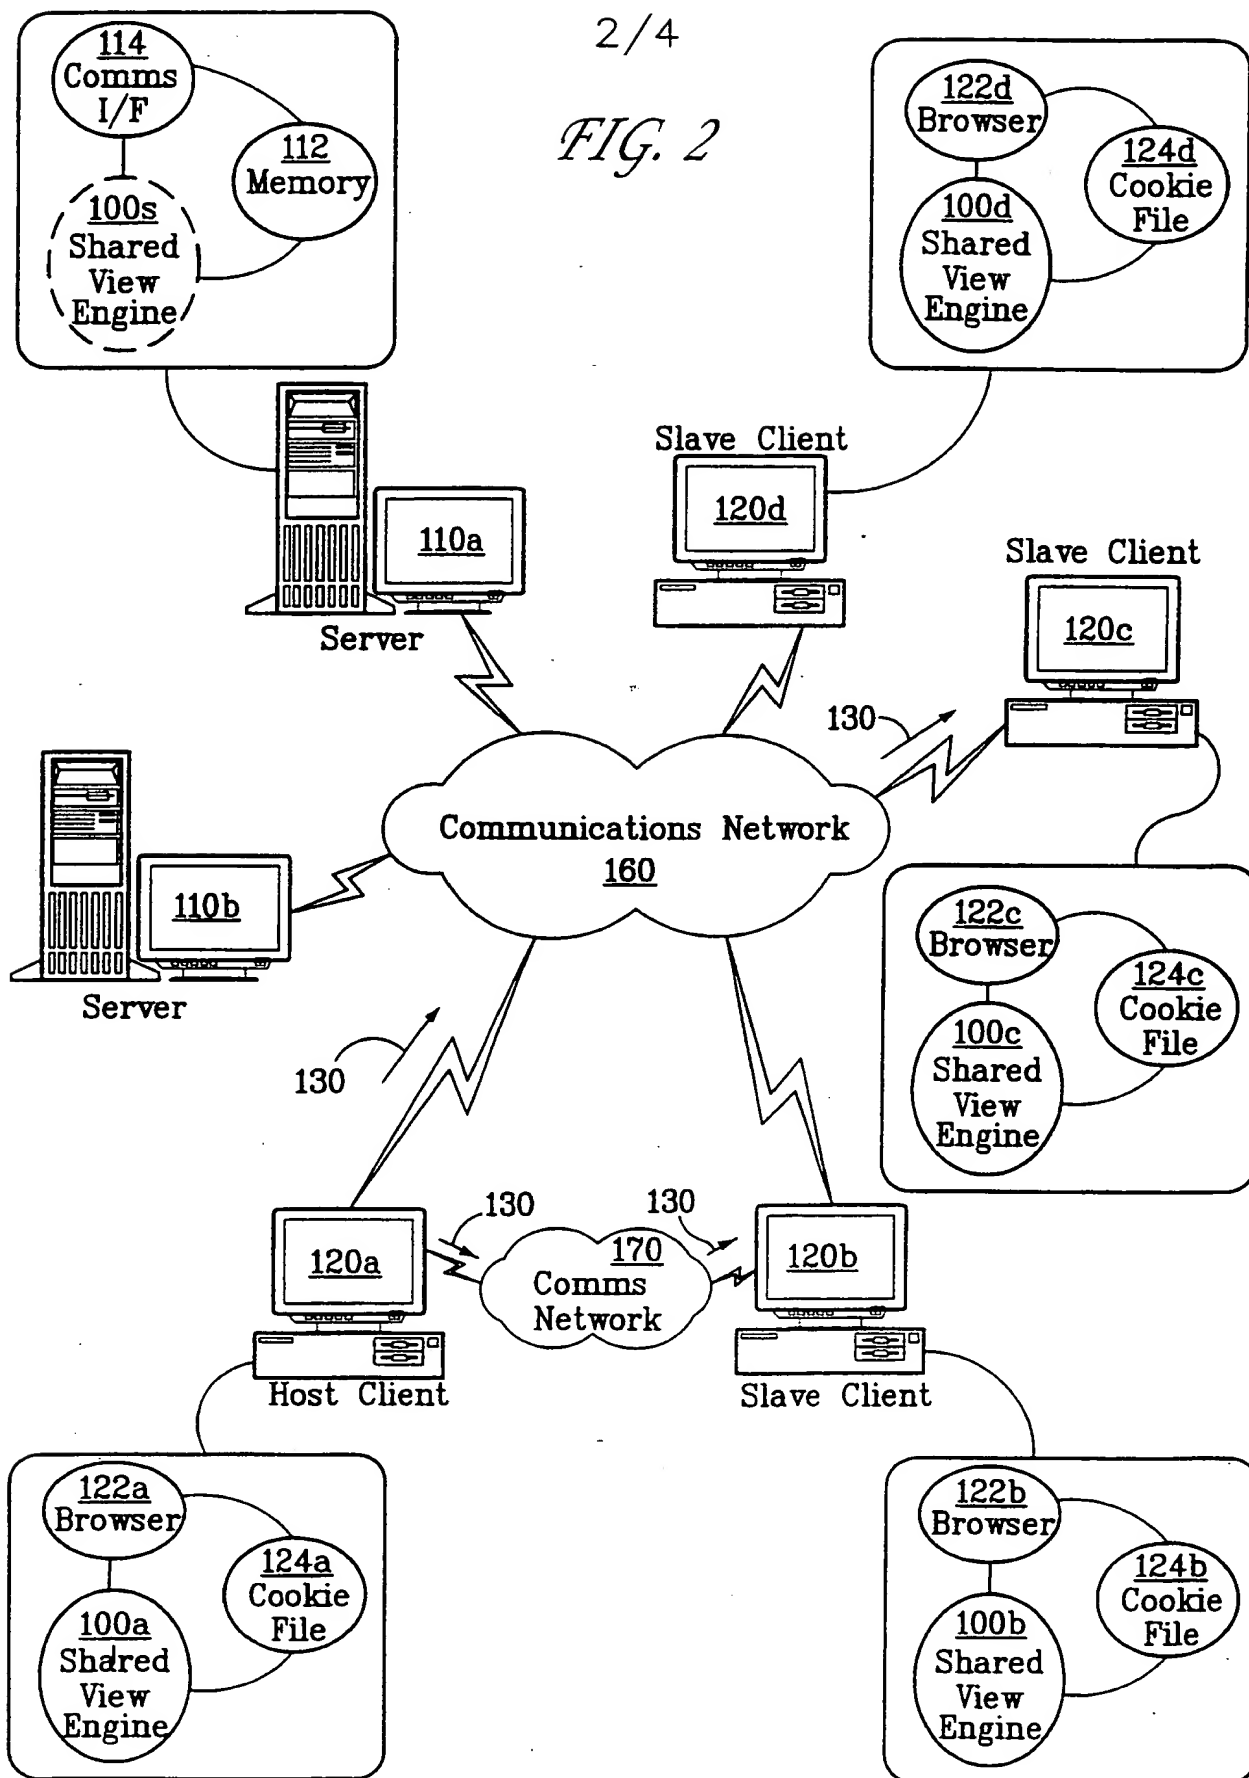


3/4

FIG. 3

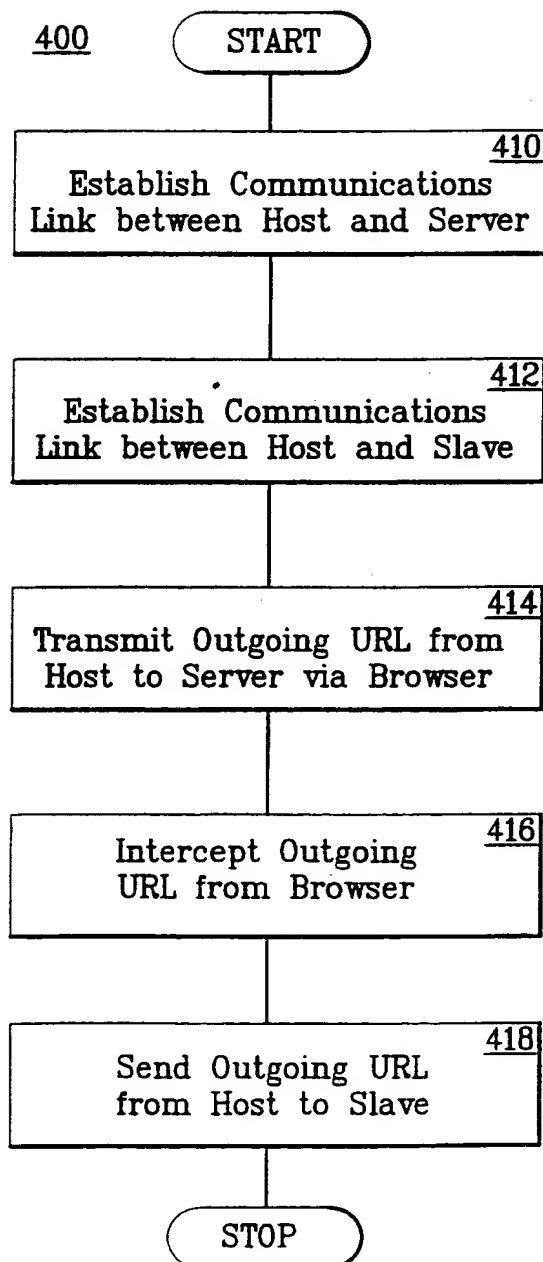

4/4

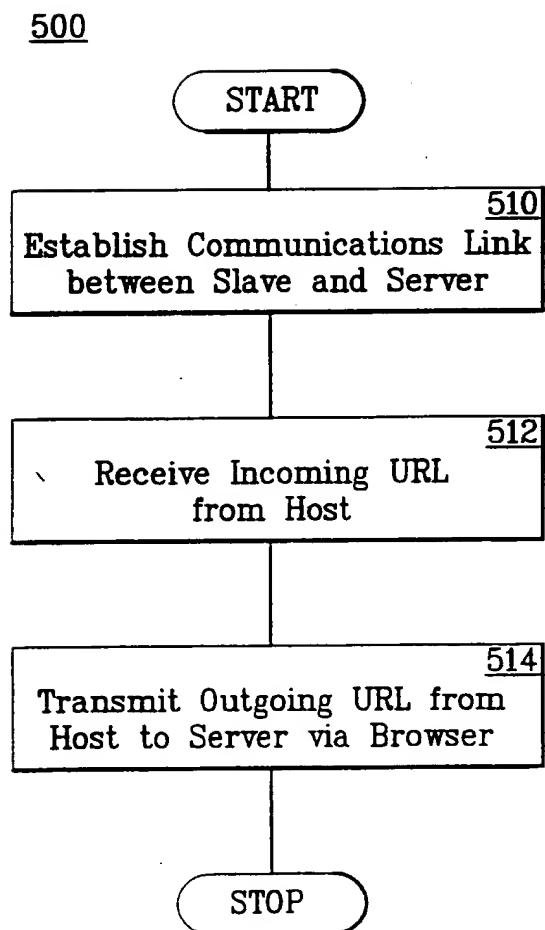FIG. 4

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/71321 A3

(51) International Patent Classification⁷: **G06F 17/30**

(21) International Application Number: **PCT/US00/11969**

(22) International Filing Date: **3 May 2000 (03.05.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/316.822 21 May 1999 (21.05.1999) US

(71) Applicant: **MICROSOFT CORPORATION [US/US];**
One Microsoft Way, Redmon, WA 98052 (US).

(72) Inventors: **ANDREW, Felix, G., T., I.**; 5221 37th Avenue N.E., Seattle, WA 98105 (US). **SOBESKI, David, A.**; 15817 N.E. 90th Street, Redmond, WA 98052 (US).

SMITH, Michael, D.; 1814 First Street, Kirkland, WA 98033 (US). **POST, Lisa, G.**; 15981 N.E. 84th Street, Redmond, WA 98052 (US).


(74) Agent: **ROCCI, Steven, J.**; Woodcock Washburn Kurtz MacKiewicz & Norris LLP, One Liberty Place, 46th floor, Philadelphia, PA 19103 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,

[Continued on next page]

(54) Title: **SHARED VIEWS FOR BROWSING CONTENT**

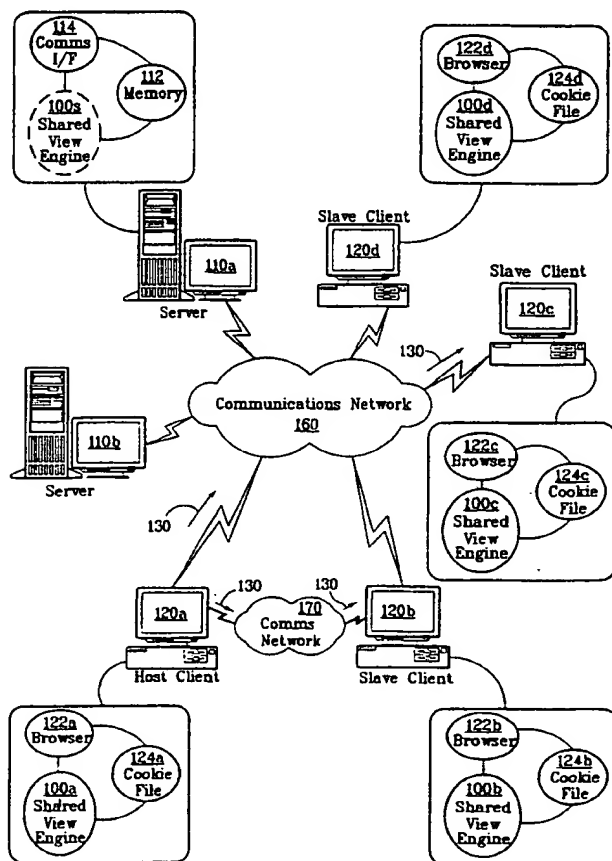

(57) Abstract: Systems and methods for enabling users at a plurality of client computers to share a common browsing experience are provided. According to the method of the present invention, a host client computer establishes a first communications link to one of a plurality of servers and a second communications link to one or more remote slave client computers. A shared view engine on the host obtains an outgoing Universal Resource Locator (URL) from a browser running on the host. The host sends the outgoing URL, along with any required cookie data, to the slave. The slave modifies its cookie file, if necessary, and requests the same content from the server by sending the received URL to one of the servers. Alternatively, the servers can deliver the same content to the host and to the slave when either the host or the slave sends a URL to one of the servers.



MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
17 January 2002

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/11969

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F17/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 833 260 A (IBM) 1 April 1998 (1998-04-01) column 3, line 29-44 column 4, line 13-55 column 14, line 33 -column 15, line 14	1-37
X	EP 0 820 028 A (LUCENT TECHNOLOGIES INC) 21 January 1998 (1998-01-21) column 2, line 27-45 column 3, line 50-58 column 4, line 36 -column 5, line 3	1-37
X	EP 0 838 770 A (NCR INT INC) 29 April 1998 (1998-04-29) column 1, line 42 -column 2, line 3 column 3, line 57 -column 4, line 17	1-37
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

18 July 2001

Date of mailing of the international search report

25/07/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Correia Martins, F.

INTERNATIONAL SEARCH REPORT

I. International Application No

PCT/US 00/11969

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 98 49635 A (SABRE GROUP INC) 5 November 1998 (1998-11-05) page 4, line 17-28 page 8, line 3 -page 9, line 5 -----</p>	1-37

INTERNATIONAL SEARCH REPORT

Information on patent family members

I. International Application No

PCT/US 00/11969

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0833260	A	01-04-1998	US 6240444 B	29-05-2001
			JP 10124461 A	15-05-1998
			KR 232509 B	01-12-1999
EP 0820028	A	21-01-1998	US 5862330 A	19-01-1999
			CA 2206134 A	16-01-1998
			JP 10116238 A	06-05-1998
			US 5991796 A	23-11-1999
EP 0838770	A	29-04-1998	JP 10232847 A	02-09-1998
WO 9849635	A	05-11-1998	AU 7155498 A	24-11-1998

THIS PAGE BLANK (USPTO)